

LOVO™SLIM RGB LED RECESSED LIGHT

Item Number: 3140-RCSL4-8W24V-4IN-RGB-WH



Lovo™Slim 12-in-1 is the first RGB LED recessed light that gives you the ability to customize on the spot! At 8 Watts and 800 lumen output, each LovoSlim fixture allows you to choose between RGB colors and change the fixture finish color instantly with magnetically attached trim rings! With Prism designed low voltage FC cable system, you can daisy chain up to 6 fixtures in a row and if more lights are needed, simply add multipoint connectors to link all the lights to a single power supply.


SPECIFICATIONS

Product Number	3140-RCSL4-8W24V-4IN-RGB-WH		
Voltage	24VDC		
Wattage	8W		
Color	RGB		
Wave Length:	Red: 620-630nm	Green: 515-530nm	Blue: 460-470nm
Lumens	300lm ~ 400lm		
Light Source	Epistar RGB LED		
Beam Angle	120°		
Material	High Quality Heat Conductive Plastic		
Fixture Trim Color	White Finish Magnetic Standard		
Trim Options	Black, Brushed Nickel, Silver, Custom Paint Grade		
IP Rated	IC Rated, IP 21		
Environment	Indoor Use		
Operation Temperature	Max Ta=45°C		
Beam Angle	120 degree		
Connectors	Lovo FC In/Out Simple Cable System		
Dimensions	5.30" D X 1" H (135mm D X 25mm H)		
Cut Out	4 3/8" (110mm)		
Lifespan	50,000hrs		
Certification	cTUVus		




LOVO™ SLIM RGB LED RECESSED LIGHT




DIMENSIONS

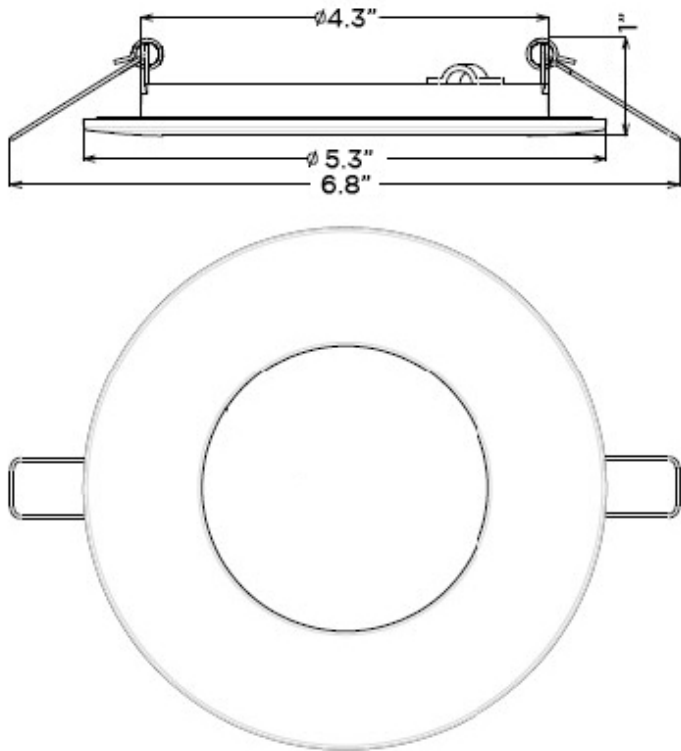



INSTALLATION

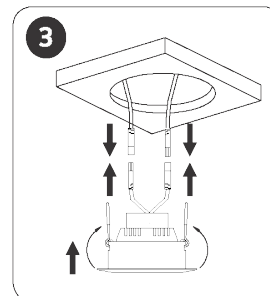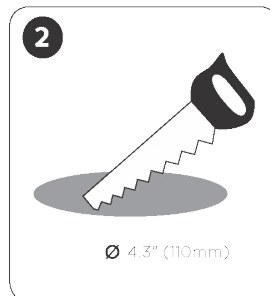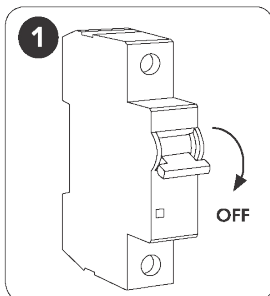

*BEFORE CONNECTING INPUT (MALE) AND OUTPUT (FEMALE), LINE UP THE ARROWS FOR PROPER ALIGNMENT THEN INSERT

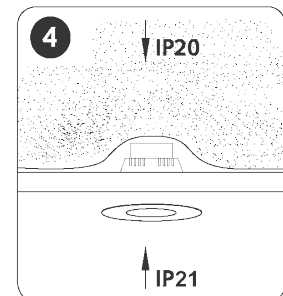

* IC rated for Insulated Ceilings

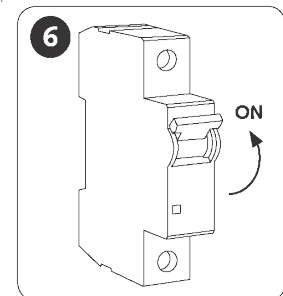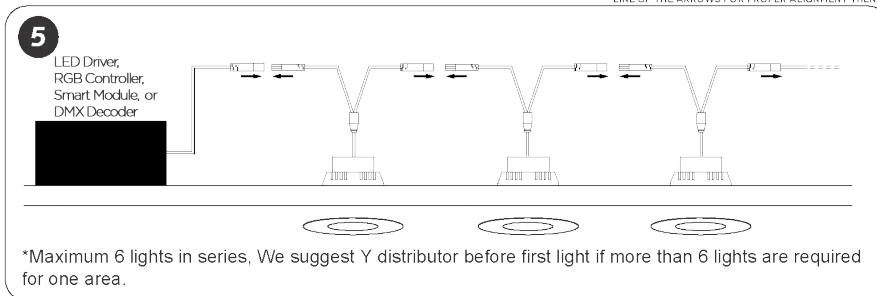

LOVO™ SLIM RGB LED RECESSED LIGHT



CAUTION

- DO NOT Connect LED Recessed Light to any voltage other than 24VDC, failure to do so may cause permanent damage to the recessed light.
- When Dimming, only compatible with RGB low voltage control, Wireless, Prism Smart Control or DMX.
- Do Not plug the driver to AC outlet before the LED Recessed Light is properly connected, it may damage the function of the LED light.
- Locate the driver in a well ventilated and accessible area as well as free from any insulating material.
- It is recommended that 20cm of open space be provided around the driver and 7.5cm around lamp housing to permit air circulation.
- We recommend you follow all local safety authority rules and regulations when installing our Prism Lovo Series products.
- Do not install or operate LED Recessed Light kit into a completely sealed environment.
- Do not install or operate LED Recessed Light kit in an environment that has humidity levels above 70%.
- DO NOT COVER the LED Recessed Light with any material, this includes all types of insulation materials.

APPLICATIONS

- Display cases
- Trade Show Exhibits
- Museum Environments
- Jewelry cabinets
- Office
- Residential
- Commercial



LOVO™ SLIM RGB LED RECESSED LIGHT



WARRANTY

Prism Lighting Group Warrants to its customers who purchase its LED fixtures that the products are free from defects in material and workmanship from the date of shipment. During warranty period, Prism Lighting Group, at their discretion, agrees and shall be obligated to a limit of refund of the purchase price of the products or replacement of fixtures.

This limited warranty will not apply to loss or damage to the product caused by: damage due to fire or acts of God; vandalism; civil disturbances; accident; failure to follow installation, operating or maintenance. This limited warranty excludes field labor and service charges related to the repair or replacement of the Product.

Complete warranty details for fixtures are available. Please contact Prism Lighting Group at 1-866-600-1380 or info@prismlightinggroup.com.