


1.5W/FT LOVO™FLEX LED FLEXIBLE TAPE LIGHTING



Lovo™Flex offers exciting LED Lighting Options for your design, from accent lighting to compelling action lighting to make your image stand out from the crowd! It provides an affordable, low energy consumption solution where stability and longevity are paramount. Manufactured with top-tier authentic premium Epistar LED chips, the SMD 2835 LED Flexible Tape Lighting is built to last. In addition to low energy consumption, these strips operate at a low temperature which means they can be used just about anywhere. They are designed for interior and exterior use and are able to bend and twist in just about any direction imaginable.

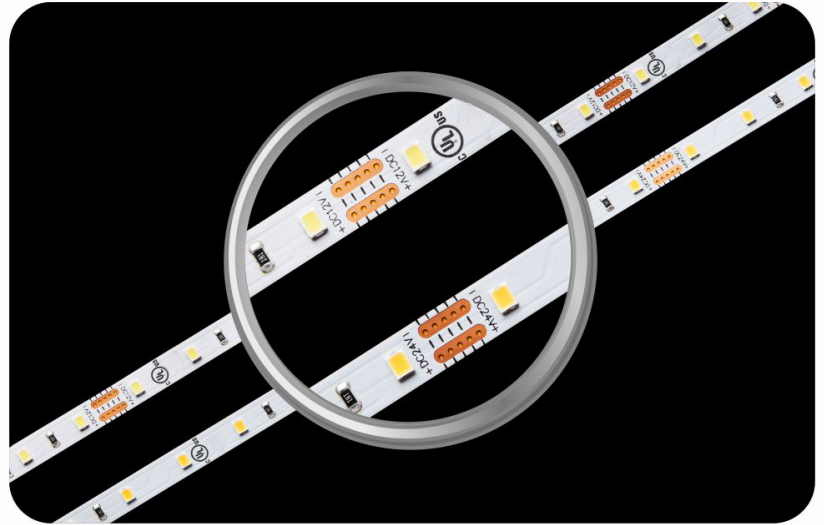


SPECIFICATIONS

Product Number	6000-FL-1.5W24V-xxK
Voltage	24VDC
Length	20Ft (6M), 50Ft (15M) & 100Ft (30M) Reel or Sold By The Foot
Color Temperature	2700K, 3000K, 3500K, 4000K, or 6000K
CRI	>90
Wattage	1.5 Watts/Ft / 4.8 Watts/M
Lumens	2700K - 164lm/Ft / 540lm/M (Warmer White) 3000K - 166lm/Ft / 545lm/M (Warm White) 3500K - 167lm/Ft / 543lm/M (Warm White) 4000K - 168lm/Ft / 550lm/M (Natural White) 6000K - 177lm/Ft / 580lm/M (Pure White)
Maximum Run	25 Ft / 7.6 M
Beam Angle	120 degree
Dimming	Yes
Material	White PCB, Tesa® Tape Backing
Cuttability	Every 4" (100mm)
IP Rating	IP43 or IP67 (other IP options Available Upon Request)
Dimensions	8mm (.31")W x 2.38mm (.09")H x Reel Length
Switching	Hardwire or Plug-in
Mounting	Attached Tesa® Tape or Extrusions
Material	White PCB, Copper Strip, Tesa® Tape Backing
LED Type & Size	Premium Epistar SMD 2835
LED Qty	18 LEDs/ft / 60 LEDs/M
Rated Life	50,000 Hours
Warranty	5 Years
Certifications	cULus 469399

1.5W/FT LOVO™ FLEX LED FLEXIBLE TAPE LIGHTING



DIMENSIONS

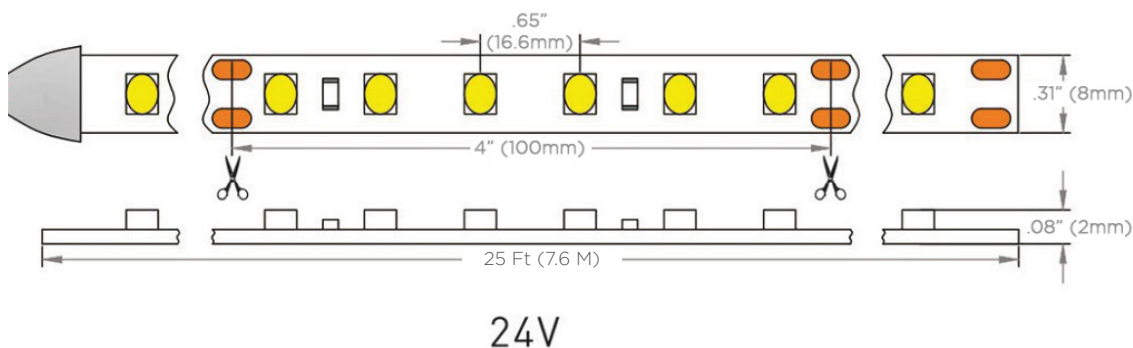

ORDER CODES

6000-FL-1.5W24V-

COLOR: 27K = 2700K 35K = 3500K 4K = 4000K 6K = 6000K	IP: IP43 IP67
--	---------------------